


FORM PTO-1130 (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEYS DOCKET NUMBER 742113-10	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/070831	
INTERNATIONAL APPLICATION NO PCT/DK00/00501		INTERNATIONAL FILING DATE 11 SEPTEMBER 2000		PRIORITY DATE CLAIMED 10 SEPTEMBER 1999	
TITLE OF INVENTION A GRADER APPARATUS					
APPLICANT(S) FOR DO/EO/US Ulnch NIELSEN					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. <input checked="" type="checkbox"/> This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)). <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31). <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau) <input checked="" type="checkbox"/> has been communicated by the International Bureau. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). <ol style="list-style-type: none"> <input checked="" type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). <input type="checkbox"/> have been communicated by the International Bureau. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. <input type="checkbox"/> have not been made and will not be made. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <input checked="" type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 					
Items 11 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. <input type="checkbox"/> A substitute specification. <input type="checkbox"/> A change of power of attorney and/or address letter. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). <input checked="" type="checkbox"/> Other items or information: Two Sheets of Drawings (Figs. 1-5) and Application Data Sheet 					

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.50) 10/070837		INTERNATIONAL APPLICATION NO. PCT/DK00/00501		ATTORNEYS DOCKET NUMBER 742113-10	
21 <input checked="" type="checkbox"/> The following fees are submitted				CALCULATIONS	
BASIC NATIONAL FEE (37 CFR 1.492(a)(1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ... \$1040.00				\$890.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ... \$890.00					
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(3)) paid to USPTO ... \$740.00					
International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ... \$710.00					
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ... \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(c)).					
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	9-20 =	0	X \$18.00	\$0	
Independent claims	2-3 =	0	X \$84.00	\$0	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	\$0
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
<input type="checkbox"/> Applicant claims small entity status See 37 CFR 1.27 The fees indicated above are reduced by 1/2				\$0	
SUBTOTAL =				\$890.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(d))				\$0	
TOTAL NATIONAL FEE =				\$890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)) The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) \$40.00 per property +				\$0	
TOTAL FEES ENCLOSED =				\$890.00	
				Amount to be refunded:	\$
				Charged:	\$
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$890.00 to cover the above fees is enclosed</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. <u>19-2380</u> in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>19-2380(742113-10)</u>. A duplicate copy of this sheet is enclosed</p>					
<p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO</p> <p>NIXON PEA BODY LLP 8180 Greensboro Drive Suite 800 McLean, Virginia 22102</p> <p>March 11, 2002</p>					
				<p> SIGNATURE</p> <p>David S. Safran NAME</p> <p><u>27,997</u> REGISTRATION NUMBER</p>	

APPLICATION DATA SHEET

Electronic Version 0.0.11

Stylesheet Version: 1.0

Publication Filing Type:

Application Type:

Title of Invention:

new-utility

utility

A GRADER APPARATUS

Attorney Docket Number: 742113-10

Legal Representative:

Attorney or Agent:

David S. Safran

Registration Number:

27997

Customer Number Correspondence Address:

22204

22204

Continuity Data:

This application is a 371 of international PCT/DK00/00501 A3 2000-09-11 PUBLISHED

Foreign Priority:

PA 1999 01281

DK

1999-09-10

Priority Claimed

Assignee (Publish): Scanvaegt International A/S

P.O. Pedersens Vej 18

Aarhus N 8200 DK

INVENTOR(s):

Primary Citizenship:

DENMARK

Given Name:

Ulrich

Middle Name:

Carlin

Family Name:

NIELSEN

Residence City:

Ry

Residence Country:

DK

Address:

Hjarbaeksvej 20

Ry , 8680 DK

With the invention it has been realised that use can be
15 made, with very attractive consequences, of a radically
changed technique for carrying out both the relevant task and
various related operations, namely by not only effecting the
delivery, but preferably also the weighing-in while making
use of the gradually highly- and commercially-developed robot
20 technique.

Especially with the use of vision equipment, it is an easy task for a robot arm to grip a conveyed item in a delivery area, e.g. with a suction cup, and feed the item to any receiving station within the operational range of the robot arm. This can be effected immediately if the item has already been weighed and its position determined with regard to the receiving station, and thus these stations do not have to be physically disposed in any certain pattern such as along a conveyor belt, regardless of whether a certain row disposition can be practical out of regard for the guiding-out and feeding away of the formed portions.

However, it is an important aspect of the invention that the robot arm in itself can be arranged not only to grip the

items, but also to determine the weight of a supplied item already during an initial lifting of the item from its under layer. This can be effected in a direct manner by mounting the gripping tool on the robot arm in connection with a weighing cell and preferably also an accelerometer, so that a weighing can be effected during an uneven movement, preferably by an initial vertical lifting, so that the weight determination and allocation of the item can be carried out when the item is lifted to a height from which there is initiated a bringing-out of the item in a direction towards the selected receiving station, including a swinging-out for the execution of a movement along one or more e.g. circular rows of receiving stations. The weight determination can also be effected in a less direct manner, e.g. by use of a vision system which, in connection with the lifting of the item, is now also given access for a detection of the underside of the item, whereby the weight can be determined with an accuracy which can be sufficient in many connections. An indirect weight determination can also be effected by the robot arm being influenced with a carefully controlled lifting moment, which will be opposed by the inertia of the item, whereby with a moment analysis of the lifting sequence an expression for the item weight can be calculated.

With the use of vision equipment for place determination of arriving items in connection with the robot-based weight determination of the gripped items, there arises a distinct changing of the conditions which have hitherto been valid for the function of the grading machines. This function has hitherto been conditional on the arriving items being fed individually to the dynamic weighing station, and thereafter conveyed individually, i.e. with suitable distance between them, along the sorting-out track, which hereafter will not apply. The vision equipment can monitor a relatively long and broad supply area at which the items can arrive both at the side of

each other and without any critical separation, neither in breadth nor lengthways direction, in that the robot arm can nevertheless drop down with great precision on any selected item. It will be a further possibility that the vision equipment can monitor up to several candidate items in seeking for an item of a certain precise weight, e.g. for the conclusion of a building-up of a portion to a fixed weight. If the vision equipment in itself is not able to effect a weight determination with the necessary accuracy, it will still, however, be able to weigh the items in a "weight-class-determined" manner, and thus hereby disclose e.g. 2-4 items which, with good probability, can be so close to the sought-after weight that one of the items will in any case be able to be used for the purpose. There can thus be effected a more accurate weight determination by the operative robot carrying out a control-weighing of these selected items, and hereby either select the best candidate or omit to use any of them.

To this can be added that by use of the vision equipment, there can also be effected a type determination of items which are supplied in mixed type formation, e.g. in the form of different pieces of parted chickens. In certain productions this will be a quite important criterion for the allocation of the items.

It must be emphasised, however, that it will not be any precondition that use be made of vision equipment, in that it has been found possible to let a robot gripping element fetch items from an area with closely-grouped items. The gripping element can possibly be arranged with a sensor for registration of a failure to grip any item, after which it can be immediately moved slightly for a new attempt.

In the handling of items such as whole fish or chicken legs ("drumsticks"), which are desired to be received at each of the receiving stations in oppositely-directed orientations so that they can be placed together in close formation, or

that they can be built up in a receiving box in portions in several layers for achieving a more-or-less horizontal upper layer in the box filling, the control unit will easily be able to be instructed whether the robot arm's gripping tool is to be influenced, if necessary, to turn the gripped item through such an angle that will be suitable for ensuring that the item, upon delivery to the receiving station, will have an orientation which accommodates the relevant requirement on the basis of the information which already exists in the control computer.

Furthermore, with the invention it will be a possibility that "the system", i.e. the controlling of the robot arm, is programmed so that from time to time, and e.g. especially after each working day, the robot arm's gripping tool is controlled for gripping a cleaning nozzle or hose, by means of which the apparatus can thereafter clean itself and all the receiving stations. Finally, the gripping tool itself can be cleaned by co-operation with a stationary cleaning nozzle.

There is hitherto considered a weight-determined portioning-out, but the technique will have further possibilities such as a pure sorting-out of items in accordance with more or less any criterion, which shall not necessarily involve a weight criterion, e.g. in accordance with type, colour, shape, degree of possible deformation etc.

The technique can also be used for the distribution of items out to a group of receiving stations, in which the received items are weighed separately with the view to feeding them together in weight-determined portions on the basis of the so-called combination-weight principle.

In the laying-out of items on a packing element, such as slices of salmon on a cardboard plate, or the laying-out of items in assortment boxes, it will be a possibility that there has been laid an item which proves to be able to be replaced by a more suitable item, and here there will be the

special possibility both that the items can be placed in special patterns, e.g. by scale layout or at the side of one another, and that the robot can be directed by the control unit to remove the "wrong" item from the under layer in favour of the laying-out of an even better item.

It is mentioned that in the supply area to the robot there can appear a relatively large number of items which can be gripped selectively, possibly even by more than a single robot. It can hereby arise that a deficit of items of one or more different qualities can be registered, e.g. in type or size, which are awaited for the furthering of a quick portioning-out. In this connection, it is a possibility that work can be effected with a supply area coupled up front, possibly even of increased size, where one or more robots work in a corresponding manner for the selective transfer of relevant items to the operative supply area.

If the operative robot arm grips an item which after weight determination is not suitable for placing in any of the receiving stations, it can deliver the item either to a re-circulation station or merely back to the supply area, or to a special parking area for items already weight determined, which are thus ready for selective collection at the first given opportunity during the further sequence.

Such a "parking area" can also be used operatively by one or more of the robots being used to receive and to carry out the weight determination of the supplied items, and thereafter deliver the items in a parking area during registration of the respective positions and weights. Hereafter, the only task to be carried out by the operation robot will to distribute the items out to the receiving stations, i.e. it can be without weighing means and without vision equipment, and it can work at increased speed in that the weighing function is omitted. In the parking area, the items can be placed closely at the sides of one another, i.e. operations can be

effected with a quite large number of candidates for portioning-out.

When work is to be carried out with the desirable, relatively fast operation frequencies, it can be quite difficult to arrange weighing equipment in connection with a robot arm. It has already been mentioned that the weighing can well be effected by an intermediate delivery of the items to a static weighing device, but this will inevitably result in an increase in the cycle time, since at each weighing there will arise both an in-swinging period and a weighing period, and since none of these can be integrated with an operative movement of items, both of these periods, regardless of whether they can be of short duration, will have a delaying effect on a quick handling of the items. In light of this, it is a special feature of the invention that it can work with "negative weighing", namely in that newly arrived items can be fed successively to a static weighing device or buffer scales which register the weight of that or those items which are placed on the scales, in that the weight determination of an item, which is then gripped and removed by the robot arm can hereby be registered by the associated reduction in the weight on the scales. The said swinging-in and weighing sequences can hereby be concluded already before the relevant item is gripped and removed, and even though a renewed swinging-in and weighing period must subsequently be accepted for determination of the weight of the removed item, this can thus be effected during the actual initial movement of the gripped item, and consequently integrated anyway with this movement without delaying the movement.

In the foregoing it is intimated that the "robot arm" moves in a pivoting movement, regardless of whether the robot otherwise or also moves in diverse horizontal directions, and here it must merely be emphasised that the invention will not be limited in a corresponding manner, the reason being that

the robot arm, with its related gripping element, can be displaced just as well as a fixed arm on a robot structure, which as an integrated whole moves in a controlled, co-ordinate-related manner in a length/breadth-controlled operating system.

In the following, the invention will be described in more detail precisely on the basis of such a co-ordinate-related system, without this excluding a pivoting system, and moreover with reference to the drawing, in which

fig. 1 is a schematic perspective view of a sorting-out or portioning apparatus according to the invention,

fig. 2 is a schematic plan view of a modified plant according to the invention,

fig. 3 is a perspective view of a receiving station therein,

fig. 4 is a plan view of a second modified plant, and

fig. 5 is a schematic perspective view of a third modified plant.

In fig. 1 there is shown a supply conveyor 2 which conveys relevant items 4 to a weighing plate 6 belonging to a weighing station, which is represented by an underlying weighing cell 8, and which is connected to a registration and control computer 10. The conveyor belt 2 continues thereafter to a double row of receiving containers or receiving stations 12, which are shown arranged in direct extension of the conveyor 2, but which could just as well assume any other direction, e.g. at right-angles to the conveyor.

Over the weighing plate there is arranged a co-ordinate-controlled guiding system 14 for an item gripping unit 16 consisting of a base part 18, which by suitable driving means is transversely displaceable in the manner of a carriage on a lengthways displaceable crossbar 20 in the structure 14, and which also has a downwards-extending arm 22 with a lower

gripping element 24 which can be moved up and down and be activated for the gripping/releasing of items 4.

The gripping element 24 could equally well be placed on a pivot arm in a diametrically-directed guide system, whereby the row of receiving stations 12 could naturally extend with a distinct curve.

When an item 4 has been delivered to the weighing plate 6, it can quickly afterwards be gripped by the gripping element 24 and thereafter carried forward for depositing in any of the receiving stations 12, based on the allocation decisions which in accordance with conventional grader technique are made by the control computer 10.

Some of the feeding problems which arise with the known grader technique will hereby already have been overcome, namely especially with regard to adhering items or items which roll easily, which can be difficult to distribute when this shall take place by sideways guiding-out from a feeding conveyor. The weighing plate 6 or a preceding section of the feeding conveyor 2 can possibly be provided with forwardly-tapering, upright V-shaped rib structure 22 which will determine a well-defined delivery position for the items 4, so that the items can be gripped and carried forward by the gripping element 24 with good security. Upon delivery of the items to the receiving stations 12, there will not arise any substantial degree of insecurity, in that all that is involved here is a more-or-less precise releasing of the gripped items 4 from the overlying gripping element 24.

In connection with the invention, however, it will be an advantageous possibility that use can be made of a detector system such as a vision camera, which can detect any non-central positioning of items 4 on the conveyor belt 2, and thus also determine whether relevant items shall be gripped in more-or-less sideways-displaced positions by the gripping element.

method, i.e. where the computer determines which of the individual items from the area 32 can be brought together in one and the same station 12 for fulfilling predetermined conditions concerning total weight and possibly the number of items.

In fig. 2 there are shown three robots, but this is naturally only an example for the increase of the working capacity in relation to the possible use of only one single robot. Precisely with the use of robots, the areas 32 and 34 will otherwise be able to be laid out with random or specially optimised basic form and positioning.

Fig. 3 illustrates a special possibility which arises precisely with the use of robots. In a receiving station 12 there is placed a carton packing 40 for the receipt of items in six different sections of the carton, which are shown with stippled lines. The robot can be controlled with good precision for placing the items 4, which have already been allocated to the carton, down in these different sections without the carton itself having to be moved. This will be a result of already-known robot technology, but it is a special characteristic of the invention that it will also be possible for the control computer to "regret" a given allocation if it is subsequently ascertained that an item delivered to a receiving station is more suitable for use in another receiving station, or a better use of a newly-weighed item in the same station. The robot can thus be instructed to collect a selected item from the items already placed in the carton packing 40 for transferring the gripped item back from the carton, with the view either of transferring the item directly to another receiving station 12 or to a distribution area 32 for available, already weight-determined items.

The same principle can also be used where carton packing 40 does not appear in the receiving stations, but simply a depositing plate 42 which is virtually divided into different

receiving sections. The robot equipment can deliver items 4 to any of these sections, but can thus also replace items therein, and after an ideal portion weight has been achieved, all of the items in the relevant station 12 can then be delivered collectively, e.g. by a scraper element 44 shown with stippled lines being made to sweep the plate 42 for the shov-
5 delivered collectively, e.g. by a scraper element 44 shown with stippled lines being made to sweep the plate 42 for the shov-
ing of all of the items to a delivery chute 46.

Fig. 4 illustrates the possibility that after weight and type determination, e.g. by use of vision equipment, the
10 items 4 fed on the conveyor 2 can be directed out to different conveyor tracks 48 for further sorting-out in accordance with suitable criteria, completely without the use of special, direct guiding means between the delivery station 6 and the feeding tracks 48, regardless of how these guiding tracks
15 are used in other respects.

In this connection, an apparatus according to the invention will be suitable for carrying out a pure sorting function based on weight or type determination of the supplied items.

In fig. 5 it is shown that a conveyor 2 can deliver items to a stop station 50 where the items can simply be crammed together. Opposite this station there is a receiving area in which two rows of receiving dishes 52 are provided, each row being arranged on a frame 54 supported on respective weighing
25 cells 56. The dishes have bottoms which can be opened, e.g. configured as disclosed in WO 98/12664, and under the rows of dishes there is arranged a conveyor 58 leading away from the station

Over the overall area there is provided a robot frame 60
30 with a not-shown "XYZ"-robot. It has been found realistic to let the robot dip down in a number of different positions in the stop station 50 for the collection of items, whereby the gripping percentage will be particularly high in that the items are and remain lying closely together. The robot can

thus transfer successively gripped items to any of the dishes 52, and for each item transferred the associated weight determination can thus be effected via the weighing cells 56. In order to minimise the cycle time, the apparatus can be
5 controlled in such a manner that after each transfer, e.g. as indicated by a stippled line 62, the gripping element will thereafter be guided back without sideways movement as marked with a stippled line 64.

This plant will be suitable for weighing-out following
10 the combination-weight principle, in that the control unit will constantly seek a number of item positions with items which together form a usable portion weight, in that at the same time the relevant dish can be opened and the portioned items deposited on the conveyors 58, or possibly only on a
15 single conveyor. The robot thus merely has the task of constantly effecting new transfers of items to the empty and re-closed dishes. This will not be effected with any fixed transfer pattern, and precisely for this reason the said direct return movement along the line 64 will have the result
20 that items are taken up from the whole breadth of the stop station 50.

When use is made of several robots, it must merely be ensured for each row of dishes that items are transferred successively only to a single dish per row, since otherwise a
25 well-defined weight/position registration can not be effected. If it is desired to avoid such a limitation, each of the dishes must be equipped with weighing means.

In must be noted that the robot function disclosed shall be understood in quite a broad sense, namely fundamentally as
30 a lifting-over function with a certain possibility of selectivity at least at the one of the areas which serve as donor and recipient respectively. With the embodiment according to fig. 5, work could thus be carried out with a fixed delivery position, namely if the dishes 52 are arranged in a con-

AMENDED CLAIMS

1. Method for the separating-out of supplied items for the batching of these items in weight-determined groups, i.e. placing the items in accordance with their weight and
5 the weight of the items already placed

whereby weight-determination and possibly also a type-determination of the arriving items is carried out,

10 and after which there is effected a selective batching of the items in weight-determined and possibly also type-determined groups

while using transport equipment having an associated control unit which arranges the allocation of the individual items to respective receiving stations for items for the
15 different groups, and for the related selective control of the transport equipment, and

whereby a transfer arrangement of the robot type is used as at least a part of the transport equipment, i. e. with a gripping element for the lifting-free of items from a supply position and a controllable movement system for the transfer of a gripped
20 item directly and selectively to a selected depositing position.

2. Method according to claim 1, by which for the weight or weight-group determination of the items, use is made of a weighing arrangement which is integrated with the gripping element for the weighing of the gripped and liftedfree
25 items.

3. Method according to claim 1, by which a "negative weighing" of the items is carried out for the weightdetermination of the items, namely that the items are supplied to a static weighing device in said supply position and that the item weight
30 is registered as a weight reduction, which takes place by the removal of the individual item.

4. Method according to claim 1, by which use is made of vision equipment for the type-, weight-and/or positiondetermination of the items.

5. Method according to claim 1, by which the robot equipment is influenced to carry out a periodic, or alternatively as required, cleaning procedure in its area of operation, namely by the gripping of a supply hose for water or other cleaning agent for the spraying of this on relevant installations in the area.

6. Apparatus for the separating-out of supplied items for the batching of these items into weight-determined groups, i.e. for placing the items in accordance with their weight and the weight of the items already placed, said apparatus comprising

- means for carrying out a weight-determination and possibly also a type-determination of the arriving items and

15

- means for effecting a selective batching of the items in weight-determined and possibly also type-determined groups comprising transport equipment, said transport equipment having an associated control unit for arranging the allocation of the individual items to respective receiving stations for items for the different groups, and for the related selective control of the transport equipment,

20

wherein its transport equipment at least partly consists of a transfer arrangement of the robot type, i.e. with a gripping element for the lifting-free of items from a supply position and a controllable movement system for the transfer of a gripped item directly and selectively to a selected depositing position.

25

7. Apparatus according to claim 6, whereby in the robot's gripping system there is inserted a weighing device for the weight-determination of the gripped and lifted-free items.

30

8. Apparatus according to claim 6, whereby in the supply position for the items there is a static weighing device for the successive receipt of one or more items for

accumulated weighing-in of the items, so that an operative weightdetermination of a gripped and lifted-free item can be effected by determination of the weight removed hereby.

- 5 9. Apparatus according to claim 6, whereby in connection with a supply area for the items there appears a stop station for the building-up of items in a closely-packed manner, and that from here the robot equipment is arranged to pick up items by gripping activation in changing positions.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22043 A3

(51) International Patent Classification: **G01G 13/00**,
B07C 5/16

(21) International Application Number: PCT/DK00/00501

(22) International Filing Date:
11 September 2000 (11.09.2000)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA 1999 01281 10 September 1999 (10.09.1999) DK

(71) Applicant (for all designated States except US): SCAN-
VÆGT INTERNATIONAL A/S [DK/DK]; P.O. Peder-
sens Vej 18, DK-8200 Århus N (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): NIELSEN, Ulrich,
Carlin [DK/DK]; Hjarbæksvej 20, DK-8680 Ry (DK).

(74) Agent: K. SKØTT-JENSEN PATENTINGENIØRER
A/S; Lemmingvej 225, DK-8361 Hasselager (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility
model), DK, DK (utility model), DM, DZ, EE, EE (utility
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK
(utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
18 October 2001

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A GRADER APPARATUS

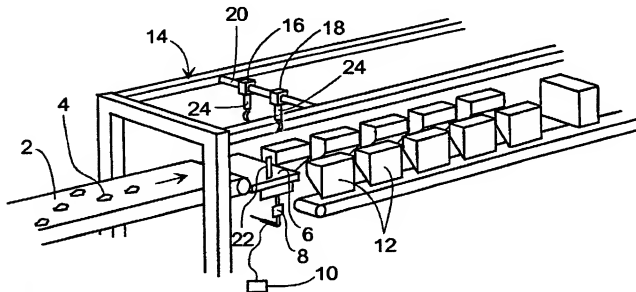

(57) Abstract: In portioning-out plants, it is current practice for the successively supplied items to be type- or weight-determined and thereafter transferred for selective depositing in selected receiving stations. With the invention, use is made of robot technique for effecting the relevant transfer of the items, which offers a number of advantageous possibilities.

WO 01/22043 A3

1/2

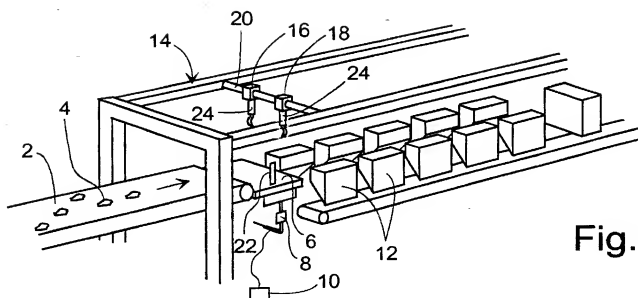


Fig. 1

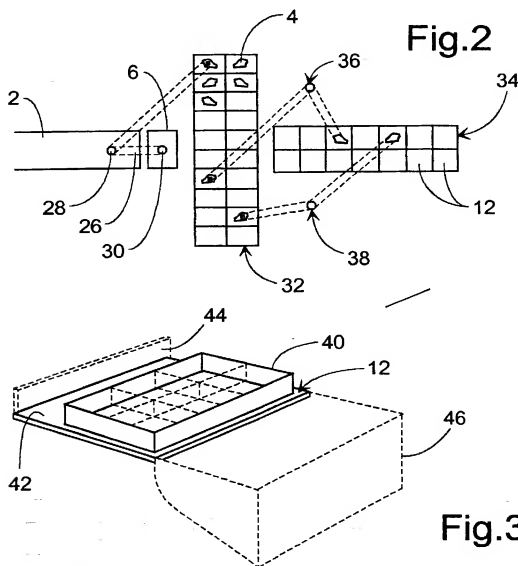


Fig. 3

2/2

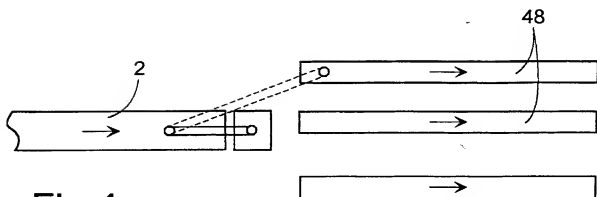


Fig. 4

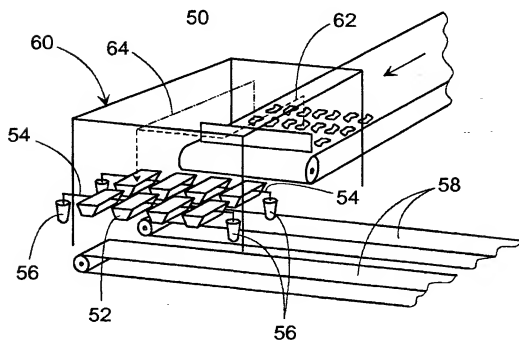


Fig. 5

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76) AND POWER OF ATTORNEY

Title of Invention **A GRADER APPARATUS**

As the below named inventor(s), I/we declare that:

This declaration is directed to:

- ☐ The attached application, or
- ☒ Application No. PCT/DK00/00501, filed on September 11, 2000,
- ☐ as amended on _____ (if applicable);

I/We believe that I/we am/are the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought;

I/We have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment specifically referred to above;

I/We acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me/us to be material to patentability as defined in 37 CFR 1.56, including material information which became available between the filing date of the prior application and the National or PCT International filing date of the continuation-in-part application, if applicable; and

All statements made herein of my/own knowledge are true, all statements made herein on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and may jeopardize the validity of the application or any patent issuing thereon.

I/We hereby appoint:

Practitioners at Customer Number 22204 as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

FULL NAME OF INVENTOR(S)

Inventor one: 1-00 Ulrich, Carin M. / SEN Citizen of: Denmark DKX

Signature: [Signature] Date: 11/6 2002

Inventor two: _____ Citizen of: _____

Signature: _____ Date: _____

Inventor three: _____ Citizen of: _____

Signature: _____ Date: _____

Inventor four: _____ Citizen of: _____

Signature: _____ Date: _____